







Assembly instructions VOSS quick connect system 270



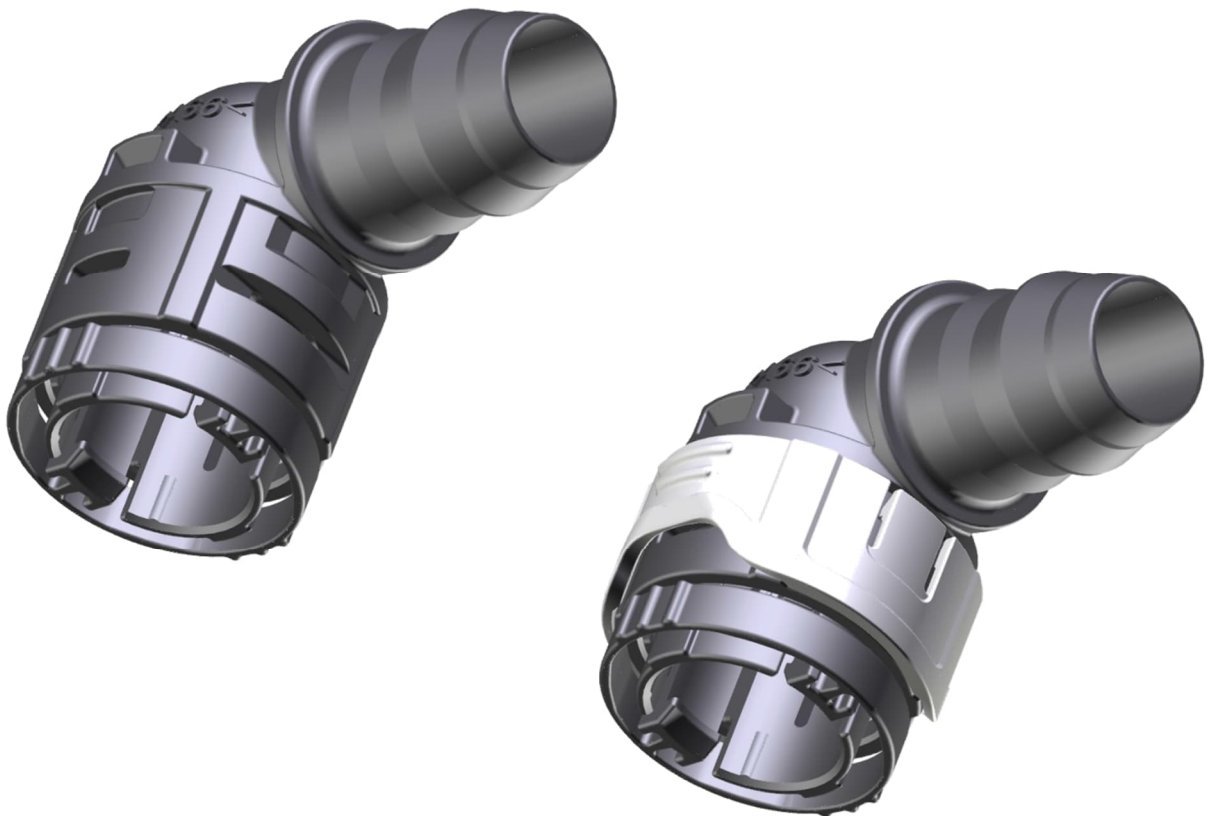



The benchmark for customized connection solutions
in thermal management

A. Important notices





System properties

-  VOSS quick connect system 270 is a plastic coupling, optionally available with Double Lock (DL), for the connection of cooling lines (PA tubes), especially at filigree cooling plates of batteries.
-  Connection port according to VOSS standard
-  Available sizes: S6, S10, S14
-  VOSS quick connect system 270^{DL} is available with a secondary lock (Double Lock) as additional safety device as well as visual and haptical connection indications.
-  The connection of the VOSS quick connect system 270 is made by plugging the coupling onto the male connection. The locking element of the coupling engages behind the collar of the connection contour. The complete snap-in connection is both visual and haptical.

Please observe before using the quick connect systems

-  VOSS quick connect system 270 is suitable for the fir-tree connection of cooling system lines, especially for battery temperature control.
-  The temperature range is from -40 °C to +85 °C
-  The maximum operating pressure is 2 bar.
-  You can use quick connect system 270 for different requirements upon request.

Please observe during assembly of the quick connect systems

-  The assembly of the quick connect system must be conducted by professional mechanics subject to these assembly instructions.
-  Incorrectly assembled connections can result in leakage or failure of the system.
-  VOSS quick connect system 270 may only be used with connections and tubes described in chapter B ("Components and material").
-  Before connecting both sides, components must be checked. They have to be clean and must not show any signs of damage.

B. Components and material

1. Tube dimensions and nominal sizes

Quick connect system 270			
PA tube		Available alignments: 90°/180°	
Inner diameter [mm]	Outer diameter x tube width [mm]	S6	S10
6	8x1	■	
8	10x1	■	
10	13x1		■
11	13x1,5		■
12	15x1,5		■

Further connection possibilities (e.g. hose), tube sizes or alignment possible on customer requests.



The tube/fir-tree connection is validated for series use exclusively with VOSS specific materials or dimensions.

2. The quick connect systems 270

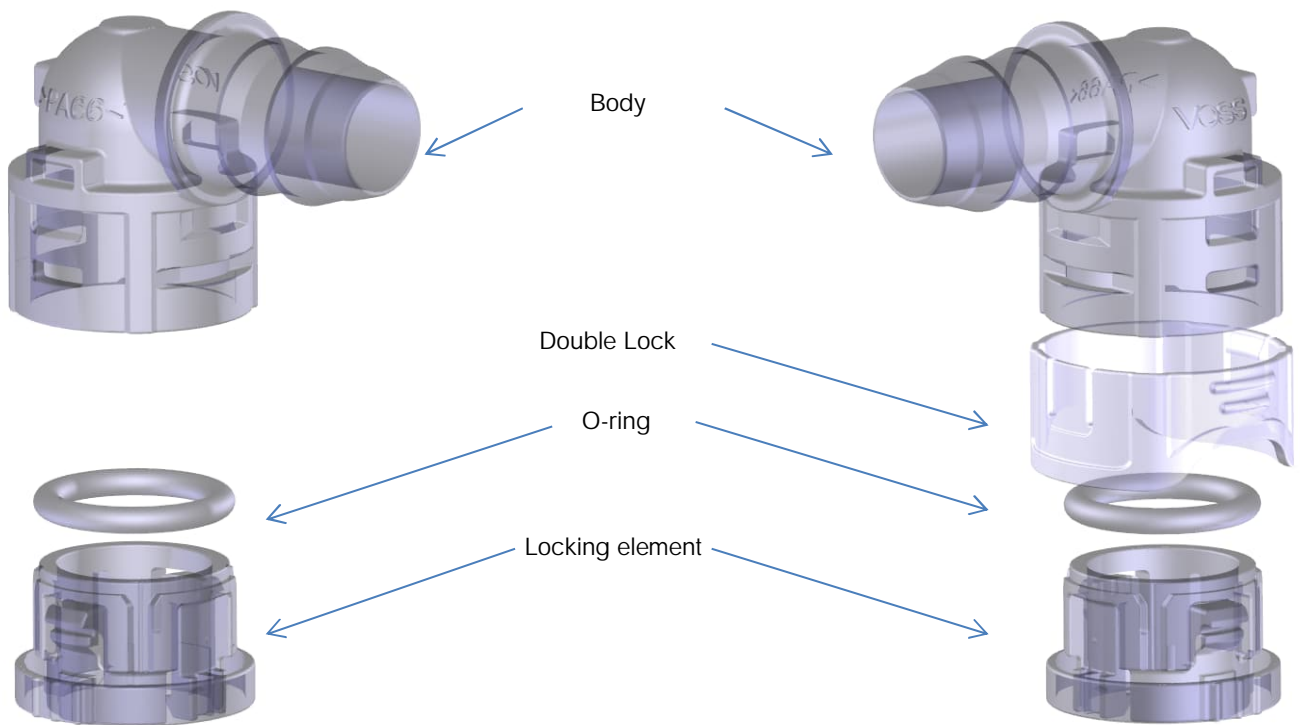


Fig. 1: Components of quick connect system 270 and 270^{DL}

Male connection profile



Fig. 2: Male connection profile according to VOSS standard (is provided)

Available alignments



Fig. 3: Straight and elbow coupling 270, locking element can be rotated 90°



Fig. 4: Straight and elbow coupling 270^{DL}, locking element can be rotated 90°

C. Assembly instructions

Use of arrow symbols in pictures:



Indicates special points of interest described in the text.



Indicates required manual actions and their direction.



Indicates operations that should be avoided.

As-delivered conditions

270



Fig. 5: As-delivered conditions quick connect system 270

270^{DL}



Fig. 6: As-delivered conditions quick connect system 270^{DL}
Double Lock in upper position

1. Assembly of nylon tube

1.1 Cutting of nylon tube to length

- ⚠ The nylon tube must be cut at a right angle.
- ⚠ The nylon tube must not be cut using a saw, as this causes burring. Burring reduces the sealing ability of the connection.

When cutting the nylon tubes to length, we recommend the use of the VOSS cutting pliers (see fig. 7) (VOSS article number: 5 9 94 55 00 00). Using the VOSS cutting pliers will ensure the tube is cut cleanly and at a right angle. Subsequent treatment of the cut surface, such as deburring, is then no longer necessary.



Fig. 7: VOSS cutting pliers for nylon tubes

1.2 Insertion of fir-tree to nylon tube

When pressing the fir-tree into the nylon tube:

- ⚠ The insertion procedure must be performed at room temperature.
- ⚠ The nylon tube must not be heated.
- ⚠ The nylon tube must be undamaged.
- ⚠ The fir-tree profile must be clean and free of any grease.
- ⚠ The fir-tree profile must be undamaged; otherwise the connection to the nylon tube will not be tight.

Insertion with the manual assembly tool

The manual assembly tool and accessories (fig. 8) are available from VOSS (VOSS article numbers available on request).

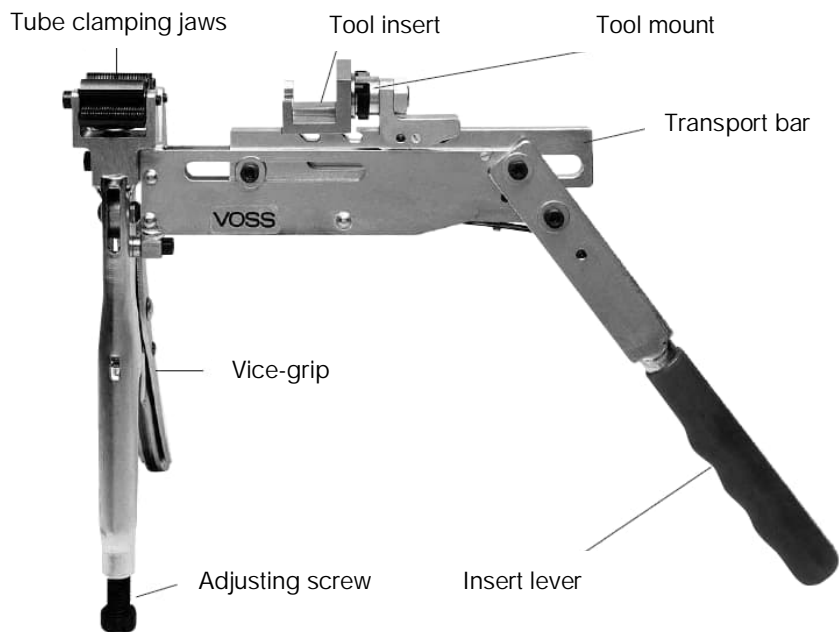


Fig. 8: VOSS manual assembly tool

Step 1

Insert a tool insert corresponding to the coupling to be mounted (straight or elbow coupling) into the tool mount.



The tool insert must be clean and free of damage, otherwise the inner O-ring of the coupling will be damaged.



Fig. 9: Inserting the tool insert

Step 2

Place the intended coupling into the tool insert.

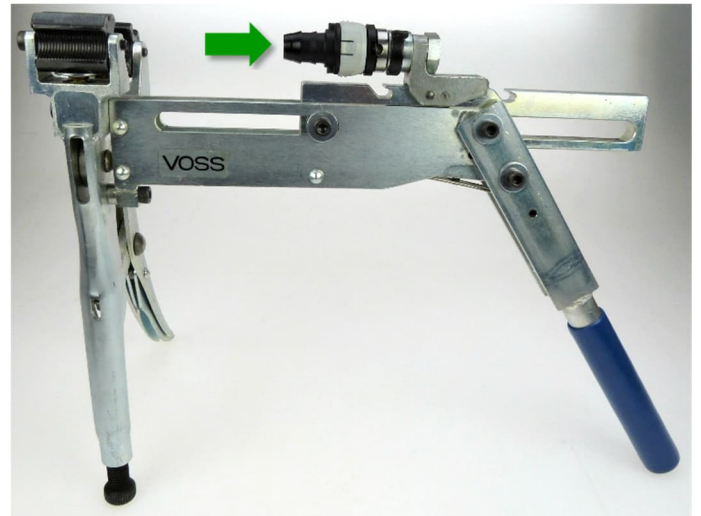


Fig. 10: Placing the coupling

Step 3

Rotate the tube clamping jaws to the correct position for the outside diameter of the tube to be mounted.



The marking of the tube sizes on the tube clamping jaws must be observed.

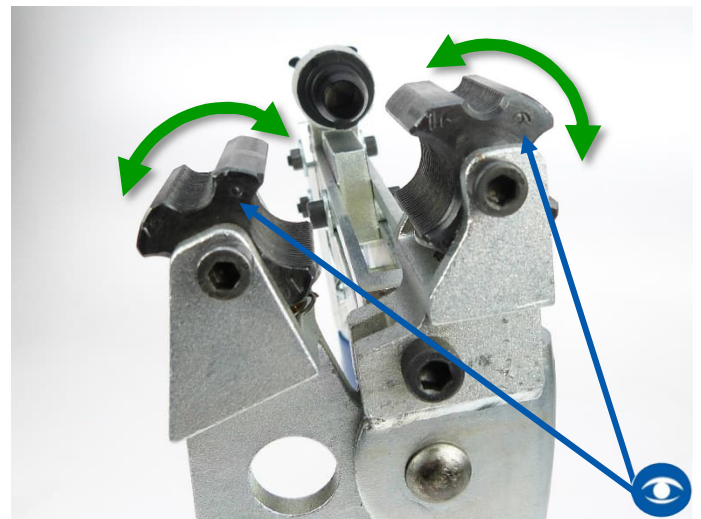


Fig. 11: Aligning the jaws

Step 4

Insert the nylon tube into the clamping jaws.



The overlap of the tube must be at least 2 mm longer than the length of the coupling's fir-tree.

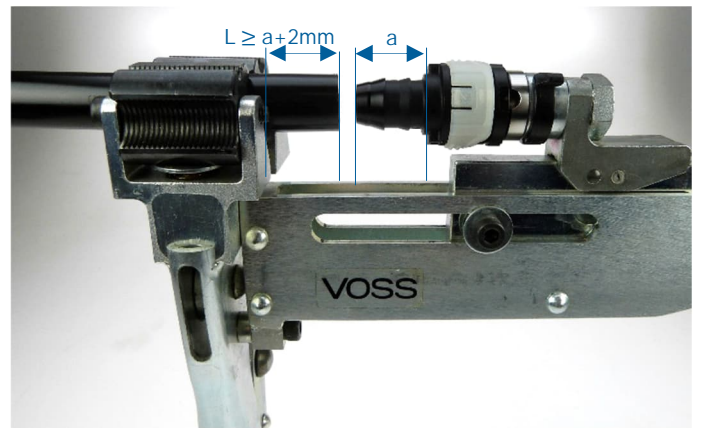


Fig. 12: Inserting of the nylon tube

Step 5

Squeeze the vice-grip to fix the nylon tube. The clamping force can be regulated with the adjusting screw.



Fig. 13: Squeezing the vice-grip

Step 6

Move the transport bar, centering the fir-tree into the inner diameter of the nylon tube.

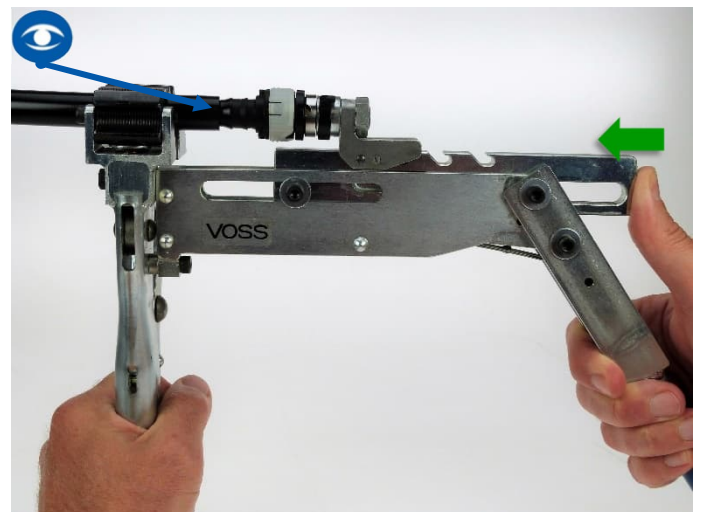


Fig. 14: Moving the transport bar

Step 7

The fir-tree has to be inserted completely into the nylon tube with the insert lever, until the stop limit is reached.



There should be no gap > 0.5 mm.

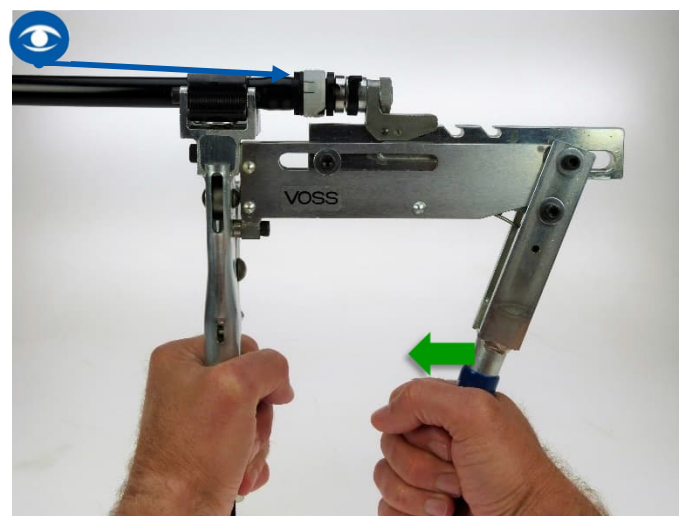


Fig. 15: Inserting the fir-tree

Step 8

Move the insert lever back.

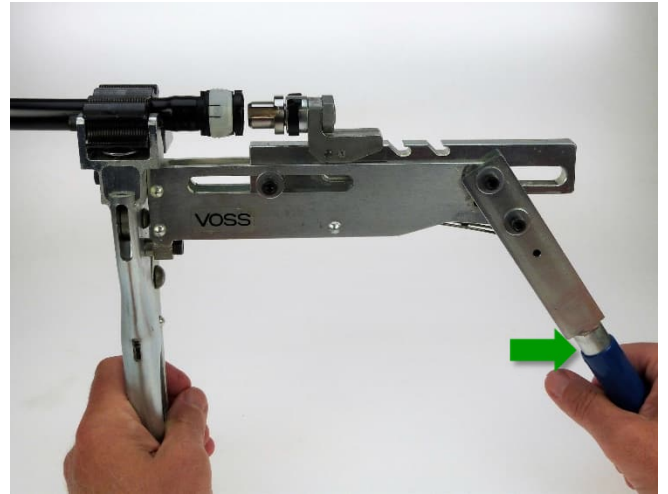


Fig. 16: Moving back the insert lever

Step 9

Move the transport bar back. The coupling is then released.

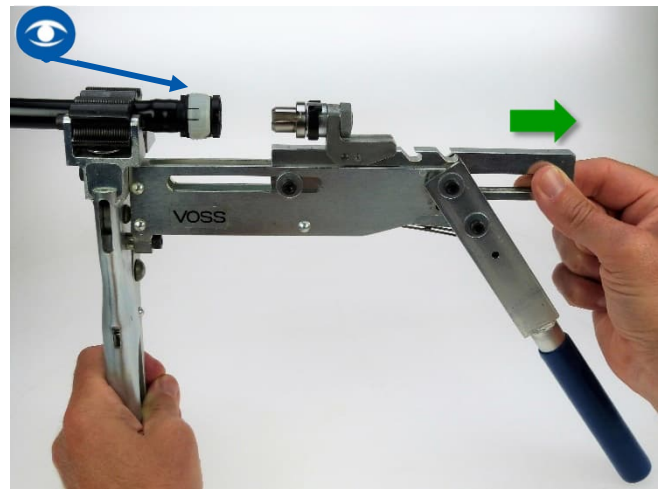


Fig. 17: Moving back the transport bar

Step 10

Release the vice-grip; remove the assembled line.

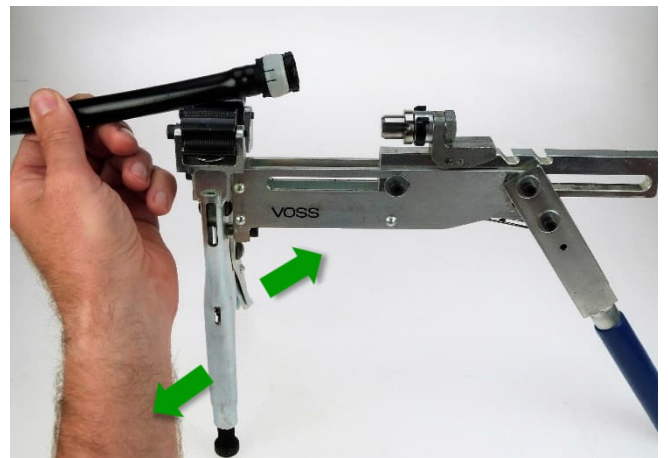


Fig. 18: Releasing the vice-grip

Step 11

Nylon tube correctly mounted on the fir-tree.



Fig. 19: Correctly assembled nylon tube

Assembly machine for series assembly

VOSS offers the assembly machine type 56 for series assembly of nylon tubes on fir-trees.

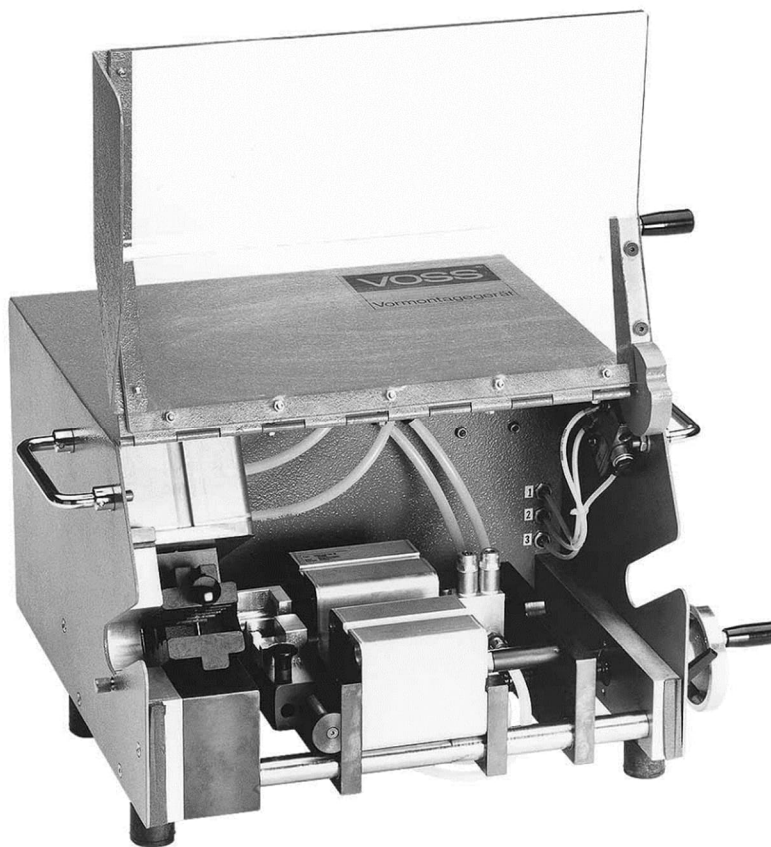


Fig. 20: VOSS assembly machine type 56

2. Assembly of QC system

270

Step 1

Coupling and male connector are separated (starting situation)

Only 270^{DL}:
Double Lock in upper position



Fig. 21: Coupling 270 and male connector separated

270^{DL}



Fig. 22: Coupling 270^{DL} and male connector separated

Step 2

Place coupling centered above male connector.



Fig. 23: Centered placement of coupling 270 above male connector



Fig. 24: Centered placement of coupling 270^{DL} above male connector

Step 3

Plug coupling onto male connector.



Fig. 25: Plugging of coupling 270 onto male connector



Fig. 26: Plugging of coupling 270^{DL} onto male connector

Incomplete assembly:
Coupling is not yet engaged and locking element is still slightly oval stretched.

Only 270^{DL}:
Double Lock cannot be activated in this position.



Fig. 27: Incomplete assembly of coupling 270



Fig. 28: Incomplete assembly of coupling 270^{DL}: blocked Double Lock

Step 4

Push the coupling onto the male connector as far as it will go. Locking element snaps into place haptically and visually recognizable.



Fig. 29: Plugging in coupling 270 as far as it will go



Fig. 30: Plugging in coupling 270^{DL} as far as it will go

Go on with step 6 (page 14)

270

Step 5

Only 270^{DL}:
Grasp the Double Lock
on the reduced/ribbed
surfaces and push it
down in the direction of
the male connector ...

... until the Double Lock
engages and is flush
with the locking
element.

Step 6

Completely assembled
coupling (final position)

270^{DL}



Fig. 31: Pushing down the Double Lock

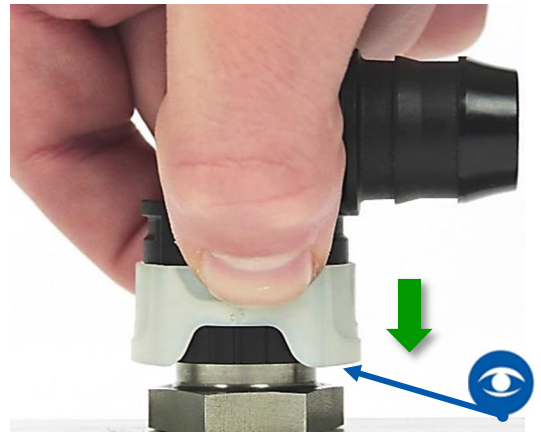


Fig. 32: Engaged Double Lock



Fig. 33: Completely assembled coupling 270



Fig. 34: Completely assembled coupling 270^{DL}

3. Disassembly of QC system

- ⚠ Before disconnecting, the line must be free of pressure, and the area around the secondary lock must be free of dirt.
- ⚠ Do not use tools such as pliers or levers for disassembly, as this will damage the QC system.

270

Step 1

Only 270^{DL}:
Double Lock is in
engaged position. In
this position locking
element cannot be
activated.

Grasp Double Lock on
the reduced/ribbed
surfaces and pull off ...

...until Double Lock
engages in upper
position. Locking
element is again
unlocked.

270^{DL}



Fig. 35: Completely assembled coupling with engaged Double Lock and locked locking element



Fig. 36: Grasping and pulling off the Double Lock



Step 2

Grasp locking element on the ripped surfaces and ...

... squeeze, so that it oval expands.

Simultaneously pull up the coupling and separate it from the male connector.

270



Fig. 38: Grasping the locking element of coupling 270

Fig. 37: Unlocked coupling 270^{DL}
270^{DL}



Fig. 39: Grasping the locking element of coupling 270^{DL}



Fig. 40: Squeezed and expanded locking element of coupling 270



Fig. 41: Squeezed and expanded locking element of coupling 270^{DL}



Step 4

Completely dis-assembled coupling with male connector

Only 270^{DL}:
Double Lock is again in upper position (starting situation).

Fig. 42: Pulling up of coupling 270
270



Fig. 44: Completely disassembled coupling 270 with male connector

Fig. 43: Pulling up of coupling 270^{DL}
270^{DL}



Fig. 45: Completely disassembled coupling 270^{DL} with male connector

Customer service

Contact VOSS for questions concerning quick connectors, nylon tubes, line routing, etc.

Property rights

All rights reserved in regard to patents, registered designs and trademarks. Drawings of the VOSS quick connect systems 270 and 270^{DL} may not be reproduced or made accessible to third parties without our prior consent.

Technical modifications and errors excepted.

Contact

VOSS Automotive, Inc.
4640 Hillegas Road
Fort Wayne, IN 46818
USA
Phone: +1 260-373-2277
customersvc@us.voss.net
www.vossusa.com

VOSS Automotive GmbH
P. O. Box 15 40
51679 Wipperfürth
Leiersmühle 2-6
51688 Wipperfürth
Germany
Phone: +49 2267 63-0
Fax: +49 2267 63-5982
automotive@voss.net
www.voss.net